

- "Walk-around" pit layout saves time spent raising and lowering a lift
- Wide coverage with 18,000-lb. (8165 kg) capacity and 22 1/2" (572 mm) runway width
- **✓** Two available runway lengths: 223- and 255-inch

HUNTER
Engineering Company

# **Specifications**

Model	Length
P441-IS	223" (5664 mm)
P441J	223" (5664 mm)
P444-IS	255" (6477 mm)
P444J	255" (6477 mm)

All models have 50 mm turnplate pockets and 4-wheel align WB 88"-158"

#### **Description**

w/ Inflation Station and (2) 9,000 lb. swing jacks

w/ (2) 9,000 lb. jacks

w/ Inflation Station and (2) 9,000 lb. swing jacks

w/ (2) 9,000 lb. jacks

### **Standard**



Swing Air-Jack, 133–83–1 9,000 lb. (4082 kg) Capacity



**Air Line Kit** 

Provides an air source at the front and rear for jacks and air tools.

## **Optional**



Integrated Inflation Reels (-IS models)

Automatically fills or bleeds each tire.




**Stainless Steel Turnplate, 25–129–1** 14", 356 mm (2 required)

**20-2076-1** PowerSlide turnplates **20-2114-1** 50 mm stainless

**20-2113-1** 50 mm low friction stainless

## **Site Requirements**\*

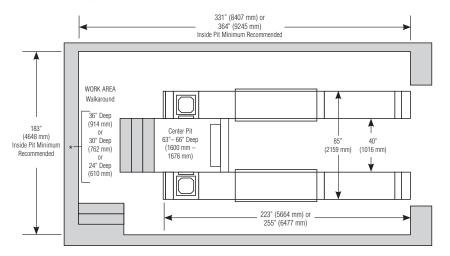

For complete site requirements see 6114-T
For P441 blueprint order 6120-T
For P444 blueprint order 6121-T

\* When ordering, 36" deep work area is standard. See blueprint for parts to order when selecting 24" or 30" work area.



0910CHE